

UNCLASSIFIED

AD NUMBER

AD805295

LIMITATION CHANGES

TO:

Approved for public release; distribution is unlimited.

FROM:

Distribution authorized to U.S. Gov't. agencies and their contractors;  
Administrative/Operational Use; SEP 1966. Other requests shall be referred to Air Force Flight Dynamics Lab., Wright-Patterson AFB, OH 45433.

AUTHORITY

AFFDL ltr 29 Dec 1971

THIS PAGE IS UNCLASSIFIED

AFFDL-TR-66-43  
PART X

805295

**AIRCRAFT GROUND-FLOTATION INVESTIGATION**  
**PART X — DATA REPORT ON TEST SECTION 9**

*W. BRABSTON and W. HILL, JR.*

*U. S. ARMY ENGINEER WATERWAYS EXPERIMENT STATION*

**TECHNICAL REPORT AFFDL-TR-66-43, PART X**

**SEPTEMBER 1966**

This document is subject to special export controls and each transmittal to foreign governments or foreign nationals may be made only with prior approval of the Air Force Flight Dynamics Laboratory (FDFM), Wright-Patterson AFB, Ohio 45433.

**AIR FORCE FLIGHT DYNAMICS LABORATORY**  
**RESEARCH AND TECHNOLOGY DIVISION**  
**AIR FORCE SYSTEMS COMMAND**  
**WRIGHT-PATTERSON AIR FORCE BASE, OHIO**

# **AIRCRAFT GROUND-FLOTATION INVESTIGATION**

## **PART X — DATA REPORT ON TEST SECTION 9**

*W. BRABSTON and W. HILL, JR.*

This document is subject to special export controls and each transmittal to foreign governments or foreign nationals may be made only with prior approval of the Air Force Flight Dynamics Laboratory (FDFM), Wright-Patterson AFB, Ohio 45433.


## FOREWORD

The investigation described herein constitutes one phase of studies conducted during 1964 and 1965 at the U. S. Army Engineer Waterways Experiment Station (WES) under U. S. Air Force Project No. 410-A, MIPR No. AS-4-177, "Development of Landing Gear Design Criteria for the CX-HLS Aircraft." (The CX-HLS is now designated C-5A.) This program was sponsored and directed by the Landing Gear Group, Air Force Flight Dynamics Laboratory, Research and Technology Division, Mr. R. J. Parker, Project Engineer.

These tests were conducted by personnel of the WES Flexible Pavement Branch, Soils Division, under the general supervision of Messrs. W. J. Turnbull, A. A. Maxwell, and R. G. Ahlvin, and the direct supervision of Mr. D. N. Brown. Other personnel actively engaged in this study were Messrs. C. D. Burns, D. M. Ladd, W. N. Brabston, H. H. Ulery, Jr., G. M. Hammitt II, and W. J. Hill, Jr. This report was prepared by Messrs. Brabston and Hill.

Directors of WES during the conduct of this investigation and preparation of this report were Col. Alex G. Sutton, Jr., CE, and Col. John R. Oswalt, Jr., CE. Technical Director was Mr. J. B. Tiffany.

Publication of this technical documentary report does not constitute Air Force approval of the report's findings or conclusions. It is published only for the exchange and stimulation of ideas.



KENNERLY H. DIGGES  
Chief, Mechanical Branch  
Vehicle Equipment Division  
AF Flight Dynamics Laboratory

## ABSTRACT

This data report describes work undertaken as part of an overall program to develop ground-flotation criteria for the C-5A aircraft. A test section was constructed to a width adequate for two test lanes. Each lane was divided into three items having different subgrade CBR values and different traffic surfaces. Item 1 was surfaced with modified T11 aluminum landing mat, item 2 with M8 steel landing mat, and item 3 remained unsurfaced. Traffic was applied to one lane with a 35,000-lb load on a single-wheel assembly consisting of a 25.00-28, 30-ply aircraft tire inflated to 50 psi. The other lane was trafficked with a 70,000-lb load on a twin-wheel assembly consisting of two 25.00-28, 30-ply aircraft tires inflated to 50 psi. Wheel spacing was 42 in. c-c.

The information reported herein includes layout of the test lanes, characteristics and print dimensions of the load assembly tires, and data collected on soil strengths, surface deformations and deflections, and drawbar pull. The traffic-coverage level is given at which each test item was considered failed.

## CONTENTS

	<u>Page</u>
SECTION I: INTRODUCTION . . . . .	1
SECTION II: DESCRIPTION OF TEST SECTION AND LOAD VEHICLE. . . . .	2
Description of Test Section. . . . .	2
Load Vehicle . . . . .	2
SECTION III: APPLICATION OF TRAFFIC, FAILURE CRITERIA, AND DATA COLLECTED . . . . .	3
Application of Traffic . . . . .	3
Failure Criteria and Data Collected. . . . .	3
SECTION IV: BEHAVIOR OF ITEMS UNDER TRAFFIC AND TEST RESULTS. . . .	6
Lane 21. . . . .	6
Lane 22. . . . .	8
SECTION V: PRINCIPAL FINDINGS . . . . .	11

## ILLUSTRATIONS AND TABLES

<u>Figure</u>	<u>Page</u>
1. Traffic distribution patterns, Test Section 9	3
2. Test load vehicle	15
3. Lane 21, item 1, prior to traffic	15
4. Lane 21, item 1. Diagonal straightedge shows small deformations existing at 600 coverages (traffic suspended)	16
5. Lane 21, item 2, prior to traffic	16
6. Lane 21, item 2. Transverse straightedge shows roughness at 300 coverages (failure)	17
7. Lane 21, item 3, prior to traffic	17
8. Lane 21, item 3. Transverse straightedge shows roughness at 300 coverages (failure)	18
9. Lane 22, item 1, prior to traffic	18
10. Lane 22, item 1. Transverse straightedge shows roughness at 400 coverages (failure)	19
11. Lane 22, item 2, prior to traffic	19
12. Lane 22, item 2. Transverse straightedge shows roughness at 100 coverages (failure)	20
13. Lane 22, item 3, prior to traffic	20
14. Lane 22, item 3. Transverse straightedge shows roughness at 100 coverages (failure)	21
15. Layout of Test Section 9 and summary of test results	22
16. Layout of surfaced items	23
17. Tire-print dimensions and tire characteristics	24
18. Average cross-sectional deformations	25
19. Permanent profile deformations	26
20. Average deflections	27

## Table

1. Summary of Traffic Data, Test Section 9	13
2. Summary of CBR, Density, and Water Content Data, Test Section 9	14

## SUMMARY

Tests on Section 9 are one phase of a comprehensive research program to develop ground-flotation criteria for heavy cargo-type aircraft. Section 9 consisted of two similar lanes, lanes 21 and 22, each of which was divided into three items (figure 15). Each item was constructed to a different subgrade CBR value and had a different traffic surface. Item 1 was surfaced with modified T11 aluminum landing mat, item 2 with M8 steel landing mat, and item 3 remained unsurfaced.

Traffic was applied to the two lanes using a 35,000-lb load on a single-wheel assembly and a 70,000-lb load on a twin-wheel assembly on lanes 21 and 22, respectively. Tire inflation pressure was 50 psi. A single 25.00-28, 30-ply aircraft tire was used on lane 21 and two 25.00-28, 30-ply aircraft tires with 42-in. c-c spacing were used on lane 22. Figure 17 gives pertinent tire-print dimensions and tire characteristics.

The lanes were trafficked to failure in accordance with the criteria designated in Part I of this report. Data were recorded throughout testing to give a behavior history of each item.

Using the test criteria mentioned above, it was possible to compare the trafficking effects of a single-wheel assembly and a twin-wheel assembly having double the test load on the single-wheel assembly. Basic performance data are summarized in the following paragraphs.

### Lane 21

#### Item 1

At 600 coverages the surface was still in good condition and traffic was suspended. The rated CBR for the item was 1.5.

#### Item 2

The item was considered failed due to roughness at 300 coverages. The rated CBR for the item was 1.9.



Item 3

The item was considered failed due to roughness at 300 coverages.  
The rated CBR for the item was 4.7.

Lane 22

Item 1

The item was considered failed due to roughness at 400 coverages.  
The rated CBR for the item was 1.8.

Item 2

The item was considered failed due to roughness at 100 coverages.  
The rated CBR for the item was 1.9.

Item 3

The item was considered failed due to roughness at 100 coverages.  
The rated CBR for the item was 4.8.

## AIRCRAFT GROUND-FLOTATION INVESTIGATION

### PART X DATA REPORT ON TEST SECTION 9

#### SECTION I: INTRODUCTION

The investigation reported herein is one phase of a comprehensive research program being conducted at the U. S. Army Engineer Waterways Experiment Station (WES), Vicksburg, Miss., as part of U. S. Air Force Project No. 410-A, MIPR No. AS-4-177, to develop ground-flotation criteria for the C-5A, a heavy cargo-type aircraft. Specifically, the tests reported herein were conducted to compare the trafficking effects on landing mat and unsurfaced soils of a single-wheel assembly and a twin-wheel assembly having double the test load on the single-wheel assembly.

Prosecution of this investigation consisted of constructing two similar traffic lanes and subjecting them to traffic of a single-wheel, 35,000-lb load, and a twin-wheel, 70,000-lb load. This part presents a description of the test section and wheel assemblies, and gives results of traffic. Equipment used, types of data and method of recording them, and general test criteria are summarized herein with more complete explanations and illustrations given in Part I of this report.

## SECTION II: DESCRIPTION OF TEST SECTION AND LOAD VEHICLE

### Description of Test Section

The test section (figure 15) was located within a roofed area in order to allow control of the subgrade CBR (California Bearing Ratio) in the test items. Section 9 was located on the same site as prior Test Sections 6, 4, and 2. The construction of Test Section 2 is described in Part III. The underlying subgrade was undisturbed by prior tests on the site so that in construction of Test Section 9 only the upper 24 in. of soil was excavated. The excavated area was backfilled to the original grade level in compacted lifts with a heavy clay soil (buckshot; classified as CH according to the Unified Soil Classification System, MIL-STD-619). Gradation and classification data for the subgrade material are given in Part I.

Two traffic lanes divided into three items each were constructed in the test section. Different subgrade strengths were obtained in the items by controlling water content and compaction effort (figure 15). Items 1 and 2 were surfaced with modified T11 aluminum landing mat and M3 steel landing mat, respectively (figure 16), and item 3 remained unsurfaced. The landing mats used are described and illustrated in Part I.

### Load Vehicle

The load vehicle is shown in figure 2. Load cart construction, details of linkage between the load compartment and prime mover, and method of applying load are explained in Part I. A 35,000-lb load on a single-wheel assembly and a 70,000-lb load on a twin-wheel assembly were used for trafficking lanes 21 and 22, respectively. Wheel spacing was 42 in. c-c on the twin-wheel assembly. Tires used on both assemblies were 25.00-28, 30 ply with inflation pressure of 50 psi. Tire-print dimensions and tire characteristics are shown in figure 17.

### SECTION III: APPLICATION OF TRAFFIC, FAILURE CRITERIA, AND DATA COLLECTED

#### Application of Traffic

Traffic was applied to the test lanes in a nonuniform pattern with intensity of traffic being varied within each lane to produce three zones of approximately 100, 80, and 20 percent traffic coverage. Traffic so distributed within a traffic lane simulates as nearly as possible the bell-shaped traffic distribution curve which results from the wander of aircraft from the lane center line. The coverage levels referred to in the tables and text herein are the total number of coverages applied to the 100 percent coverage zone. The corresponding number of coverages applied to the outer traffic zones is proportional to the percentage factor for the respective zones as shown in figure 1.

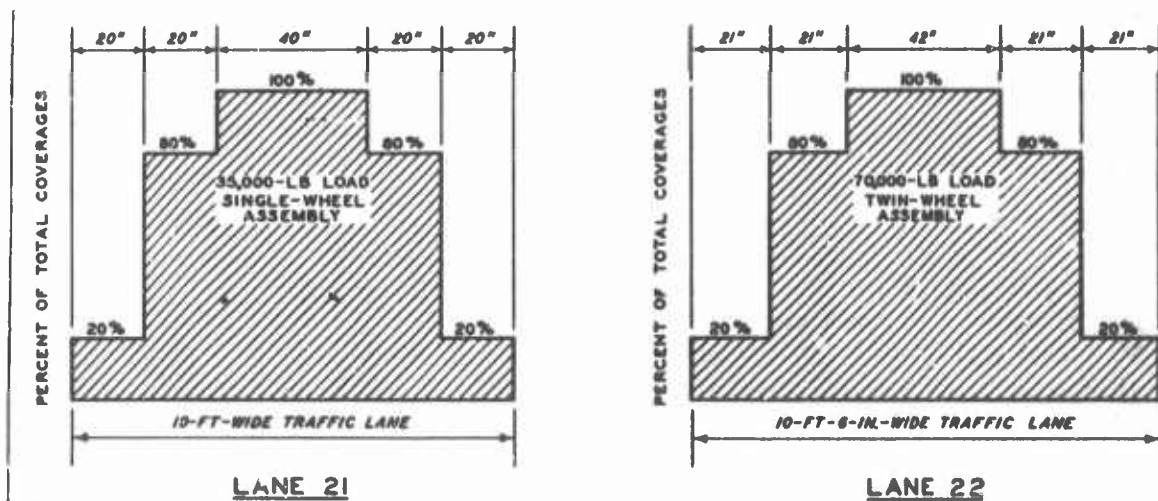


Figure 1. Traffic distribution patterns, Test Section 9

#### Failure Criteria and Data Collected

Failure criteria used in this investigation and descriptive terms used in presentation and discussion of data in this report are presented in Part I. A general outline of types of data collected is given in the following paragraphs.

#### CBR, water content, and dry density

CBR, water content, and dry density of the subgrade were measured for each test item prior to application of traffic, at intermediate coverage levels, and at failure or suspension of traffic if no failure condition

was reached. After traffic was concluded on an item, a measure of sub-grade strength termed "rated CBR" was determined. Rated CBR is generally the average CBR value obtained from all the determinations made in the top 12 in. of soil during the test life of an item. In certain instances, extreme or irregular values may be ignored if the analyst decides that they are not properly representative.

#### Surface roughness, or differential deformation

Surface roughness, or differential deformation, measurements were made using a 10-ft straightedge at various traffic-coverage levels on all items. Rut depths were measured for the unsurfaced items, and dishing effects of individual mat panels in the mat-surfaced items were recorded.

#### Deformations

Deformations, defined as permanent surface changes in cross section or profile of an item, were charted by means of level readings at pertinent traffic-coverage levels.

#### Deflection

Deflection of the test surface under an individual static load of the tracking assembly was measured at various traffic-coverage levels on both surfaced and unsurfaced items. Level readings on the item surface on each side of the load wheels and on a pin and cap device directly beneath a load wheel provided deflection data. Both total (for one loading) and elastic (recoverable) deflections were measured on unsurfaced items. All mat deflection was for practical purposes recoverable, i.e. total deflection equaled elastic deflection. The pin and cap device for measuring deflection directly beneath load wheels was applied to the subgrade of surfaced items through a hole (existing or cut) in the mat.

#### Rolling resistance

Rolling resistance, or drawbar pull, measurements were performed with the load vehicle over each test item at designated coverage levels. Three types of drawbar measurements were taken: (a) maximum force required to overcome static inertia and commence forward movement of the load cart, termed "initial DBP"; (b) average force required to maintain a constant speed once the load vehicle is in motion, termed "rolling DBP"; and (c) maximum force obtained during the constant speed run, termed "peak DBP."

#### Mat breaks

Mat breaks on the surfaced items were inspected, classified by type,

and recorded at various coverage levels. Illustrations and descriptions of each type of break are given in Part I.

## SECTION IV: BEHAVIOR OF ITEMS UNDER TRAFFIC AND TEST RESULTS

### Lane 21

#### Behavior of items under traffic

Item 1. Figure 3 shows item 1 prior to traffic. The item sustained 600 traffic coverages without developing appreciable roughness or mat breakage. Traffic was suspended at 600 coverages with the item surface remaining in good condition (figure 4). The rated CBR of the item was 1.5.

Item 2. Figure 5 shows item 2 prior to traffic. At 20 coverages the item evidenced average transverse and diagonal differential deformations of about 1 in. The item held up well under continued trafficking until 300 coverages when it was considered failed due to roughness (figure 6). The rated CBR for the item was 1.9.

Item 3. Figure 7 shows item 3 prior to traffic. The item resisted rutting throughout trafficking. At 300 coverages the item was considered failed due to roughness (figure 8). The rated CBR for the item was 4.7.

#### Test results

Results of trafficking lane 21 are summarized in table 1. Soil test data are shown in table 2.

Item 1. Item 1 sustained 600 coverages without evidencing signs of failure and remained in good condition when traffic was suspended. The following information was obtained from traffic tests on item 1.

- a. Roughness. Differential deformations that developed with trafficking are recorded in table 1. At 600 coverages (suspension of traffic), the item was still in good condition with average transverse and diagonal differential deformations of 0.97 and 1.10 in., respectively. Average dishing measurement (table 1) was 0.50 in.
- b. Deformation. Figure 18 shows average cross-section deformations at 20, 200, and 600 coverages for each of two typical mat runs. Cross-section deformations remained small throughout trafficking, although there was considerable general subgrade subsidence. Profile deformations along the mat end-joint line nearest the lane center line are shown in figure 19.
- c. Deflection. Average elastic mat deflections shown in figure 20 for three positions of the wheel assembly relative to mat end joints show a steady increase at measurement intervals ranging from 0 to 600 coverages.

- d. Rolling resistance. Drawbar pull values for several coverage levels are shown in table 1. The trend was for drawbar pull values to increase with coverages.
- e. Mat breaks. Only six mat breaks were recorded when traffic was suspended at 600 coverages.

Item 2. Item 2 was considered failed due to roughness at 300 coverages. The following information was obtained from traffic tests on item 2.

- a. Roughness. Differential deformations shown in table 1 indicate a steady increase with number of traffic coverages. At failure the average transverse and diagonal differential deformations were 2.97 and 3.03 in., respectively. Dishing measurements were small, averaging 0.19 in. at failure.
- b. Deformation. Figure 18 shows average cross-section deformations at 20, 200, and 300 coverages for each of two typical mat runs. The greatest deformation is seen to occur at the lane center line. Profile deformations along the mat end-joint line nearest the lane center line are shown in figure 19. General subgrade subsidence along the length of the lane is evident as well as surface irregularities in the mat.
- c. Deflection. Average elastic mat deflections are shown in figure 20 for three positions of wheel assembly relative to mat end joints. The increasing magnitude of deflections was consistent with increasing number of coverage levels when the mat joint was at center line of the wheel assembly. Plots shown for other positions of the load wheel on the mat surface indicated variable results with no consistent pattern.
- d. Rolling resistance. Drawbar pull values for 0, 20, and 300 coverages are shown in table 1. All drawbar values registered consistent increases with higher coverage levels.
- e. Mat breaks. The number and types of mat breaks are shown in table 1. The first observed break was recorded at 100 coverages. Some protrusion of the overlapping mat end joints occurred with continued traffic with only a few additional breaks being noted.

Item 3. Item 3 was considered failed due to roughness at 300 coverages. The following information was obtained from traffic tests on item 3.

- a. Roughness. Differential deformations and rut depths measured at intervals throughout trafficking are shown in table 1. Rut depths did not reach serious proportions at any time, but transverse and diagonal differential deformation showed steady increases with trafficking. At 300 coverages both the transverse and diagonal differential deformations averaged 3.50 in. Average rut depth was 0.91 in.



- b. Deformation. Figure 18 shows average cross-section deformations measured at 20, 200, and 300 coverages. Subsidence of the traffic lane near the center line of the cross section, as illustrated in the deformation plot, contributed to the excessive differential deformations that were the primary factor in failure of the item. Profile plots along a line 2 ft east of the lane center line are shown in figure 19.
- c. Deflection. Average total deflections measured at 0, 20, 200, and 300 coverages are shown in figure 20. Deflections increased consistently with traffic coverages. Elastic soil deflections measured at intervals during trafficking are shown in table 1.
- d. Rolling resistance. Drawbar pull values are shown in table 1 for 0, 20, and 300 coverages. Peak and rolling drawbar values increased steadily with trafficking while initial values decreased slightly.

#### Lane 22

#### Behavior of items under traffic

Item 1. Figure 9 shows item 1 prior to traffic. The item was considered failed due to roughness at 400 coverages (figure 10). The mat surface was not severely damaged at failure. The rated CBR was 1.8.

Item 2. Figure 11 shows item 2 prior to traffic. The item settled along the center line with trafficking and was considered failed due to roughness at 100 coverages (figure 12). The rated CBR was 1.9.

Item 3. Figure 13 shows item 3 prior to traffic. The item was considered failed due to roughness at 100 coverages (figure 14). The rated CBR was 4.8.

#### Test results

Results of trafficking lane 22 are summarized in table 1. Soil test data are shown in table 2. Table 1 contains drawbar pull values for the test vehicle operating over an asphalt-paved strip for comparison with drawbar pull measurements obtained on the test lane.

Item 1. Item 1 was considered failed due to roughness at 400 coverages. The following information was obtained from traffic tests on item 1.

- a. Roughness. Differential deformations, shown in table 1, increased steadily with traffic coverages throughout testing. At failure the average transverse and diagonal differential deformations were both 2.63 in. Average longitudinal differential deformation was 1.38 in. Table 1 shows an average dishing measurement of 0.60 in. at failure.

- b. Deformation. Figure 18 shows average cross-section deformations at 20 and 400 coverages for two typical mat runs. The cross section did not show uniform deformation with trafficking, but due to mat standoff, surface measurements were erratic. The particular mat run plotted, showing joint line 1.75 ft left of lane center line, was higher at 400 coverages than at 20 coverages due to extreme mat bridging in that area.\* The profile deformation plot shown in figure 19 illustrates the progressive development of surface irregularities on the item.
- c. Deflection. Average elastic mat deflections under static load of the load-wheel assembly are shown in figure 20 for three positions of the assembly relative to mat end joints. Deflections measured at 0, 20, and 400 coverages increased steadily throughout testing. Elastic soil deflection at 400 coverages was 1.0 in.
- d. Rolling resistance. Drawbar pull values are shown in table 1 for several coverage levels during testing. Except for initial drawbar pull which changed little with trafficking, the drawbar values tended to increase with number of coverages.
- e. Mat breaks. Mat breaks were first recorded at 100 coverages. Table 1 shows breaks as they developed with trafficking. The principal form of mat break was rivet failure.

Item 2. The item was considered failed due to roughness at 100 coverages. The following information was obtained from traffic tests on item 2.

- a. Roughness. Differential deformations that developed with trafficking are recorded in table 1. At 100 coverages the average transverse and diagonal differential deformations were 4.19 and 3.88 in., respectively. Dishing of individual mat panels averaged 0.25 in. at 100 coverages.
- b. Deformation. Figure 18 shows average cross-section deformations at 20 and 100 coverages for two typical mat runs. Deformation measurements increased consistently between the two coverage levels shown. The surface was depressed across the center portion of the cross section with ridges forming along the lane edges. The profile plot in figure 19 shows the progressive settlement along the full length of the item.
- c. Deflection. Average elastic mat deflections under static load of the load-wheel assembly are shown in figure 20 for three positions of the assembly relative to mat end joints. Elastic subgrade deflections are shown in table 1 for several coverage

---

\* The normal procedure is to plot the average of the deformations of two similar runs, but in this case the other run measured was eliminated at 300 coverages due to necessary subgrade repairs.

levels. At 100 coverages the elastic subgrade deflection was 1.0 in.

- d. Rolling resistance. Drawbar pull values are shown in table 1 for 0, 20, and 100 coverages. Drawbar values showed overall increases with trafficking.
- e. Mat breaks. No breaks were observed in the M8 mat surface during trafficking.

Item 3. Item 3 was considered failed due to roughness at 100 coverages. The following information was obtained from traffic tests on item 3.

- a. Roughness. Differential deformations and rut depths measured at intervals throughout trafficking are shown in table 1. Transverse and diagonal differential deformations were most severe with average readings of 4.07 and 4.10 in., respectively, at 100 coverages. Rut depths averaged 3.62 in. at 100 coverages.
- b. Deformation. Figure 18 shows average cross-section deformations measured at 20 and 100 coverages. The surface was greatly deteriorated at 100 coverages with a high ridge along the lane center line and smaller ridges near the lane edges. Figure 19 shows a profile along a line 1.75 ft west of the lane center line. The greatest deformations occurred in the segment of the item adjoining the mat-surfaced item.
- c. Deflection. Average total soil deflections measured at 0, 20, and 100 coverages are shown in figure 20. Total soil deflection was greater at 20 coverages than at 100 coverages. Elastic soil deflections shown in table 1 follow a similar pattern with the maximum value occurring at 20 coverages.
- d. Rolling resistance. Drawbar pull values are shown in table 1 for 0, 20, and 100 coverages. All drawbar values showed progressive increases with number of traffic coverages.

## SECTION V: PRINCIPAL FINDINGS

From the foregoing discussion, the principal findings relating test load, wheel assembly, tire inflation pressure, surface type, subgrade CBR, and traffic coverages are as follows:

<u>Load, Wheel Assembly, and Tire Pressure</u>	<u>Type of Surface</u>	<u>Rated Subgrade CBR</u>	<u>Coverages at Failure</u>
<u>Lane 21</u>			
35,000-lb load; single-wheel assembly; 25.00-28, 30-ply tire at 50-psi inflation pressure	Modified T11 aluminum mat	1.5	600 (no failure)
	M8 steel mat	1.9	300
	Unsurfaced	4.7	300
<u>Lane 22</u>			
70,000-lb load; twin-wheel assembly (42 in. c-c); 25.00-28, 30-ply tire at 50-psi inflation pressure	Modified T11 aluminum mat	1.8	400
	M8 steel mat	1.9	100
	Unsurfaced	4.8	100

TABLE 1  
SUMMARY OF TRAFFIC DATA, TEST SECTION 9

Test Item	Cover- ages	Rated CBR	No. of Mat Breaks <sup>a</sup>					Differential Deformation (in.)						Dishing or rutting (in.)		Average Total Deflection (in.)						Elastic Sub- grade Deflec- tion (in.)	Remarks								
			Longi- tudinal					Trans- verse		Diagonal		Max	Avg	Min	Max	Avg	Min	Max	Avg	Min	Max										
			A	B	C	D	E	Max	Avg	Max	Avg													Max	Avg	Max	Avg	Max	Avg	Max	Avg
Lane 21																															
1 Modified T11 aluminum landing mat	0	↑	--	--	--	--	--	--	--	--	--	--	--	3.5	2.8	0.7	--	--	1.5	--	0.3	--	--	1.6	--	Traffic suspended at 600 cover- ages; no failure					
	20		--	--	--	--	--	--	0.63	0.50	0.50	0.35	--	--	3.1	1.6	0.7	--	--	1.5	--	0.7	--	1.6	--						
	40		--	--	--	--	--	0.78	0.56	0.63	0.50	0.38	--	--	--	--	--	--	--	--	--	--	--	--	--						
	100		--	--	--	--	--	0.88	0.69	0.73	0.68	0.50	0.38	--	--	--	--	--	--	--	--	--	--	--	--						
	150	1.5	--	--	--	--	--	1.00	0.82	0.73	0.66	0.50	0.41	--	--	--	--	--	2.0	--	1.9	--	--	1.7	--						
	200		--	--	--	--	--	1.25	0.97	1.13	0.91	0.50	0.50	0.38	4.0	3.2	1.6	--	2.2	--	2.1	--	--	1.9	--						
2 MS steel landing mat	0	↑	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	2.1	1.2	Item failed at 300 coverages due to roughness					
	20		--	--	--	--	--	--	0.63	0.36	1.13	0.91	0.13	0.13	3.1	2.5	0.5	--	1.9	--	1.1	--	--	1.1	1.7						
	40		--	--	--	--	--	0.75	0.63	1.36	1.19	1.25	1.06	0.25	0.25	3.5	1.5	0.6	--	1.0	--	1.2	--	1.3	--						
	100	1.9	--	--	--	--	--	0.88	0.81	1.75	1.50	1.44	0.25	0.25	--	--	--	--	--	--	--	--	--	--	--						
	150		--	--	--	--	--	1.00	0.88	2.13	1.76	2.13	1.13	0.13	--	--	--	--	--	--	--	--	--	1.7	1.2						
	200		--	--	--	--	--	1.25	1.03	1.00	0.76	1.25	1.10	0.50	0.47	--	--	--	--	--	--	--	--	1.4	1.3						
3 Unsurfaced	0	↑	--	--	--	--	--	--	--	--	--	--	--	3.9	3.5	1.7	--	--	1.9	--	1.3	--	--	1.7	1.5	Item failed at 300 coverages due to roughness					
	20		--	--	--	--	--	--	0.50	0.35	0.94	0.31	0.31	0.31	4.6	2.0	0.9	--	0.6	--	--	--	--	--	0.5						
	40		--	--	--	--	--	0.50	0.25	2.90	1.78	--	--	3.9	2.5	1.1	--	0.7	--	--	--	--	--	--	0.6						
	100	1.7	--	--	--	--	--	0.50	0.34	2.63	1.69	2.38	1.72	0.69	--	--	--	--	--	--	--	--	--	--	--						
	150		--	--	--	--	--	0.25	0.25	3.13	1.79	3.25	1.86	1.25	0.78	--	--	--	--	--	--	--	--	--	--	0.7					
	200		--	--	--	--	--	0.25	0.25	4.13	2.26	3.90	2.13	1.38	0.88	--	--	--	--	--	--	--	--	--	--	0.9					
Lane 22																															
1 Modified T11 aluminum landing mat	0	↑	--	--	--	--	--	--	--	--	--	--	--	8.0	5.6	3.9	--	--	2.3	2.1	2.2	2.1	2.4	2.4	--	Item failed at 400 coverages due to roughness					
	20		--	--	--	--	--	0.75	0.63	1.00	0.75	1.00	0.94	0.50	0.38	8.4	7.8	3.3	3.1	3.1	3.0	3.7	2.1	2.1	--						
	40		--	--	--	--	--	1.25	0.97	1.25	1.00	1.13	1.04	0.50	0.41	8.3	6.6	3.1	--	--	--	--	--	--	--						
	100	1.8	--	--	--	--	--	1.63	1.19	1.74	1.50	2.00	1.38	0.75	0.41	--	--	--	--	--	--	--	--	--	--						
	150		--	--	--	--	--	1.50	1.22	2.36	2.00	2.25	1.97	0.75	0.63	--	--	--	--	--	--	--	--	--	--						
	200		--	--	--	--	--	1.63	1.38	2.75	2.63	2.88	2.63	0.63	0.60	7.9	7.8	5.6	5.0	5.8	5.0	4.4	5.8	5.7	1.0						
2 MS steel landing mat	0	↑	--	--	--	--	--	--	--	--	--	--	--	7.2	6.7	2.8	--	--	1.8	1.6	2.0	1.7	1.8	1.3	0.9	Item failed at 100 coverages due to roughness					
	20		--	--	--	--	--	0.75	0.57	1.63	1.53	1.53	--	--	--	7.9	6.4	4.6	2.3	2.3	2.1	1.8	2.2	1.0	1.3						
	40		--	--	--	--	--	0.88	0.78	4.35	4.19	3.88	0.38	0.25	0.25	8.3	7.2	4.8	--	--	2.1	1.6	2.2	1.0	1.3						
	100		--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	0.5	Item failed at 100 coverages due to roughness				
	150		--	--	--	--	--	0.25	0.22	2.00	1.76	2.25	1.75	1.88	0.86	7.2	6.8	3.5	--	--	--	--	--	--	--	0.7					
	200		--	--	--	--	--	1.00	0.91	5.00	4.07	6.00	4.10	3.75	3.62	9.7	7.8	5.1	--	--	--	--	--	--	--	0.5					
Asphalt strip			--	--	--	--	--	--	--	--	--	--	--	5.3	1.7	3.0	--	--	--	--	--	--	--	--	--	--					

Note: For trafficking lane 21, a single-wheel assembly loaded to 35 kips was used. For lane 22, a twin-wheel assembly loaded to 70 kips was used. On both lanes, 75,000-psi, 30-ply tires inflated to 90 psi were used.  
<sup>a</sup> Break types are defined and illustrated in Part 1.

TABLE 2

## SUMMARY OF CBR, DENSITY, AND WATER CONTENT DATA, TEST SECTION 9

Test Item*	Type of Surface	Coverages	Depth (in.)	CBR	Water Content (%)	Dry Density (lb/cu ft)			
Lane 21									
1	Modified Till aluminum landing mat	0	0	1.2	32.4	86.0			
			6	0.7	34.1	83.8			
			12	1.4	34.9	83.2			
			18	1.7	35.0	82.9			
		600	0	2.8	31.9	86.5			
			6	1.6	35.2	84.0			
			12	1.4	33.6	85.0			
			18	1.6	34.3	85.4			
			2	M8 steel landing mat	0	0	1.6	31.5	86.9
						6	1.7	32.8	84.0
12	2.7	32.2				85.9			
18	2.9	31.2				88.3			
300	0	2.1			31.7	88.6			
	6	1.6			33.1	86.4			
	12	1.6			34.0	85.7			
	18	2.2			33.1	86.4			
	3	Unsurfaced			0	0	3.8	28.2	90.8
						6	4.4	28.0	92.5
12			6.0	26.2		94.8			
18			4.8	28.7		91.6			
300			0	4.7	26.1	95.1			
			6	5.3	27.6	92.9			
			12	4.2	29.5	90.1			
			18	3.8	31.9	86.5			
			Lane 22						
			1	Modified Till aluminum landing mat	0	0	1.4	33.5	84.2
6	0.7	35.6				82.5			
12	2.2	33.0				85.8			
18	1.3	35.1				82.8			
400	0	2.0			34.2	83.8			
	6	1.8			34.7	83.8			
	12	1.7			34.3	84.5			
	18	2.0			35.0	83.4			
	2	M8 steel landing mat			0	0	1.2	32.3	86.5
						6	1.2	36.6	81.5
12			2.4	34.0		84.5			
18			3.1	33.0		85.3			
100			0	2.2	32.1	86.4			
			6	2.0	33.6	84.5			
			12	2.1	32.4	87.5			
			18	3.2	32.7	87.2			
			3	Unsurfaced	0	0	4.4	25.8	93.7
						6	4.5	28.9	91.7
12	6.7	26.1				94.2			
18	3.0	29.8				89.1			
100	0	4.2			28.4	92.6			
	6	4.1			28.7	92.8			
	12	5.0			27.6	92.7			
	18	3.5			29.8	91.2			

\* Subgrade material was a heavy clay (buckshot; classified as CH) in all items.



Figure 2. Test load vehicle

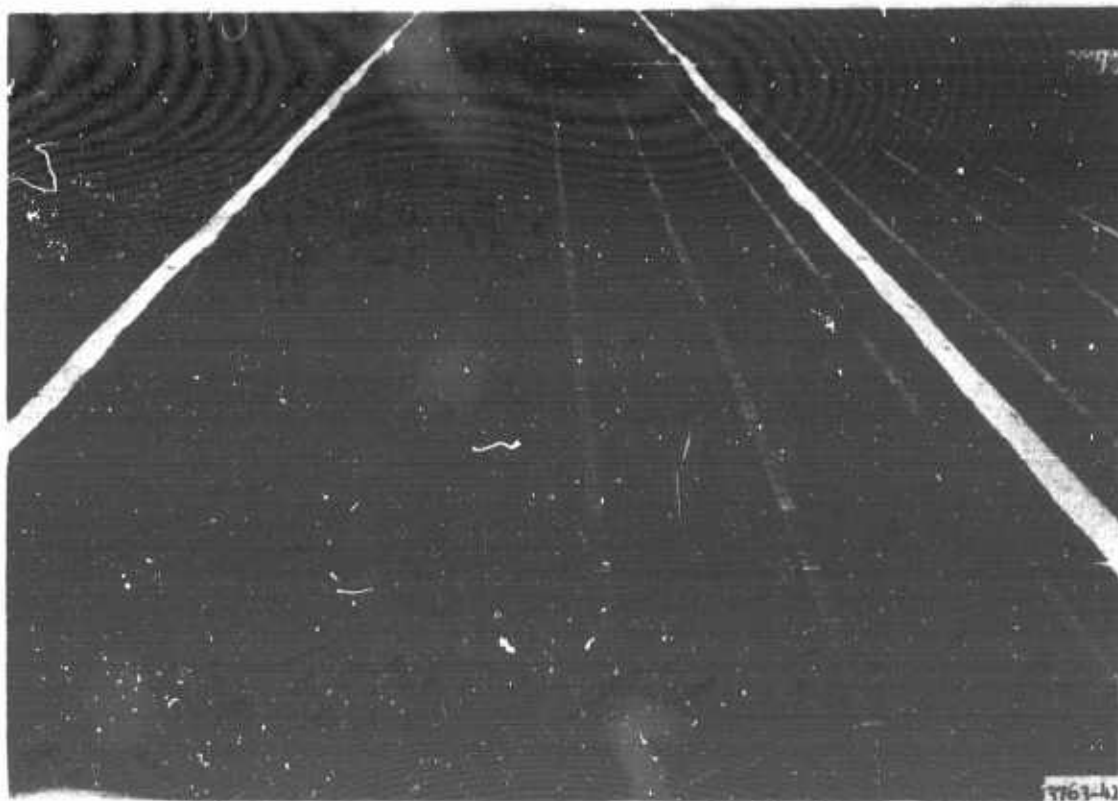


Figure 3. Lane 21, item 1, prior to traffic



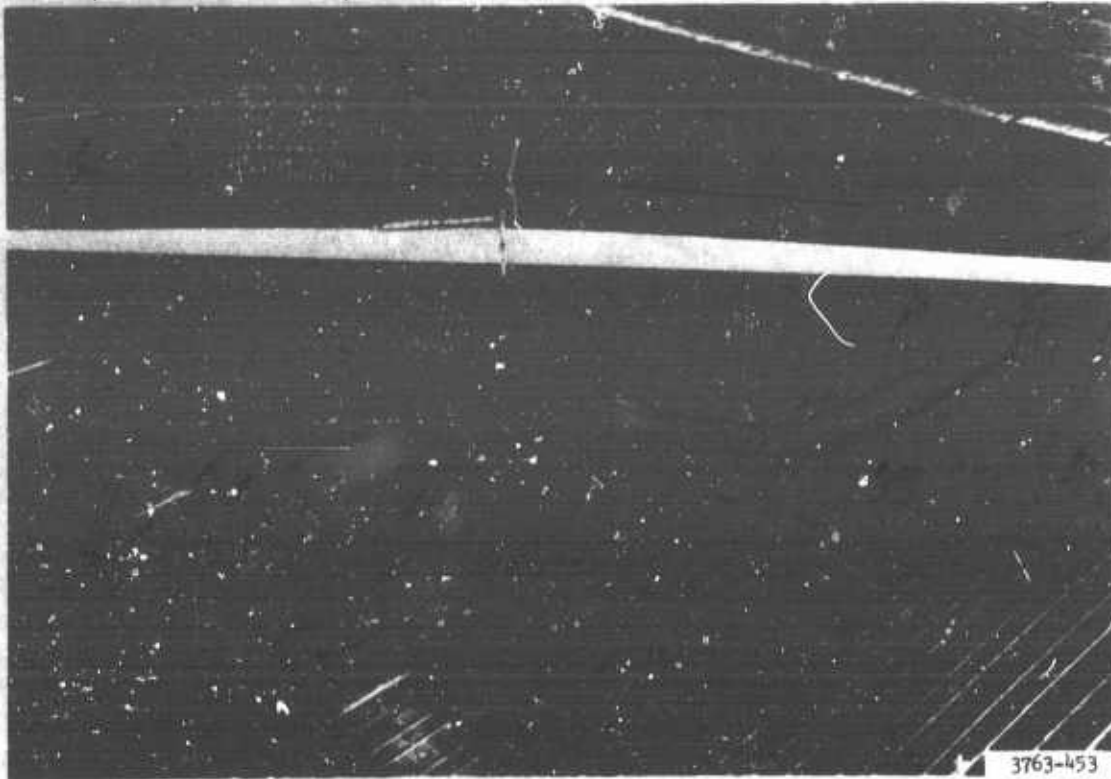


Figure 4. Lane 21, item 1. Diagonal straightedge shows small deformations existing at 600 coverages (traffic suspended)

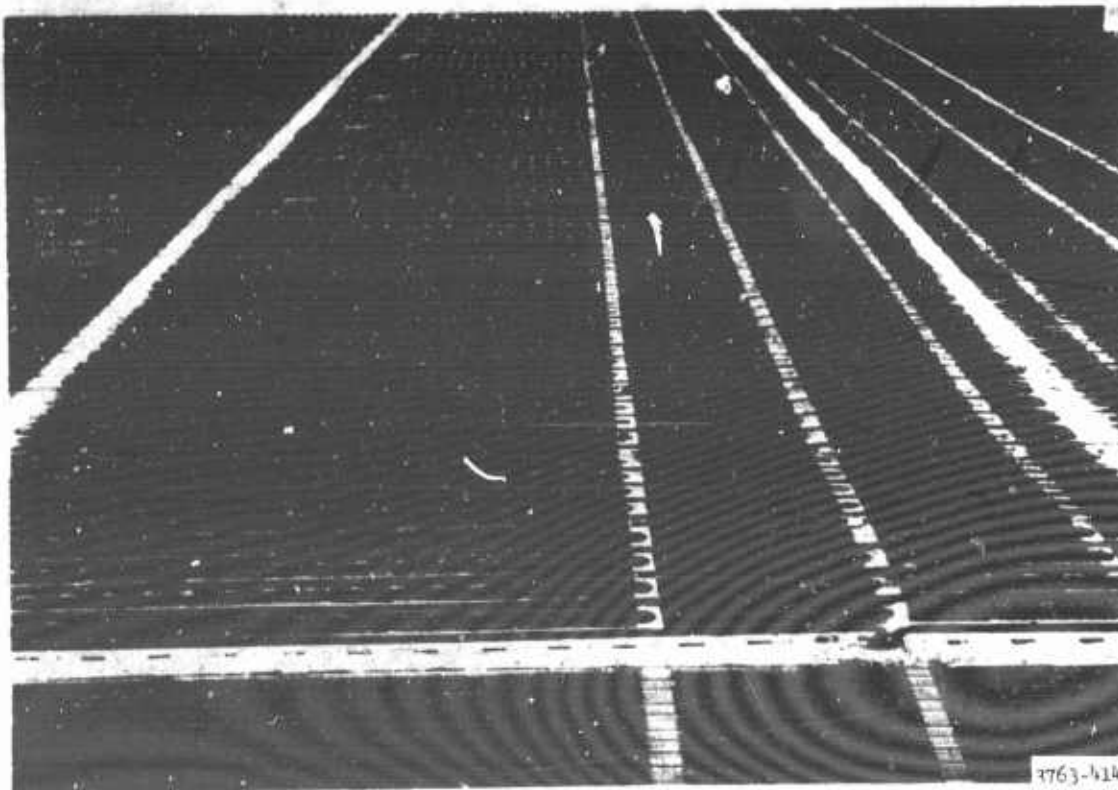


Figure 5. Lane 21, item 2, prior to traffic



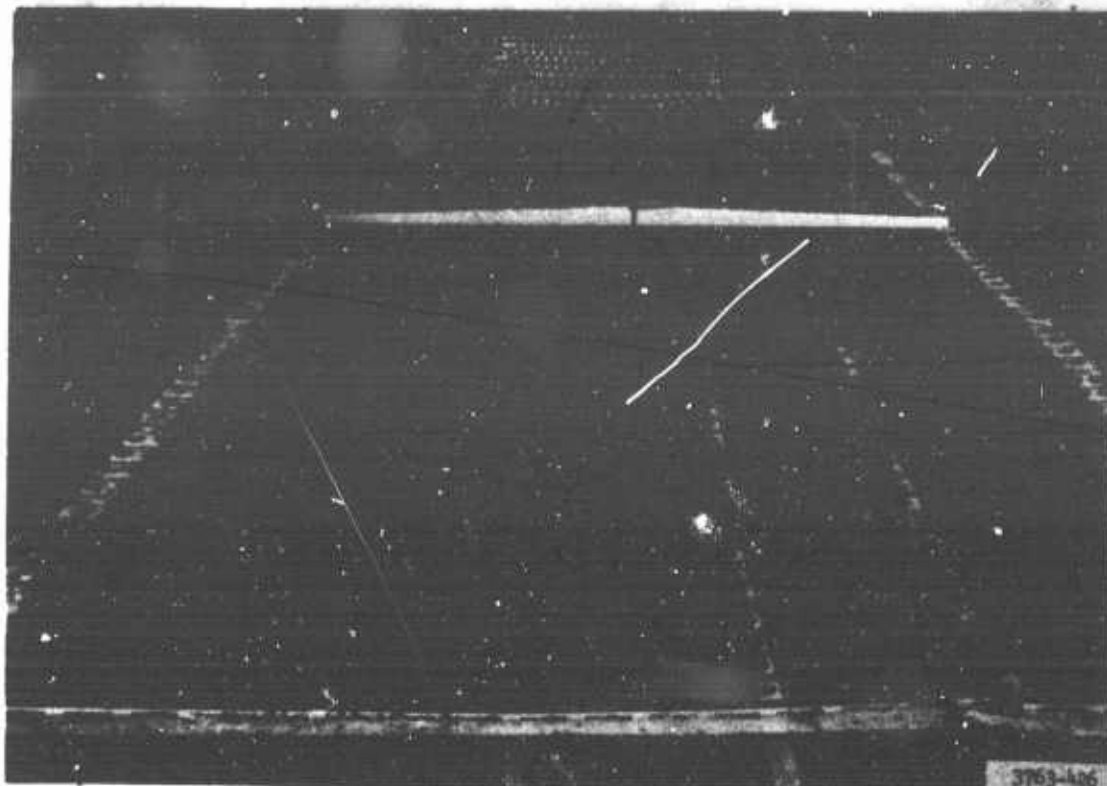


Figure 6. Lane 21, item 2. Transverse straightedge shows roughness at 300 coverages (failure)

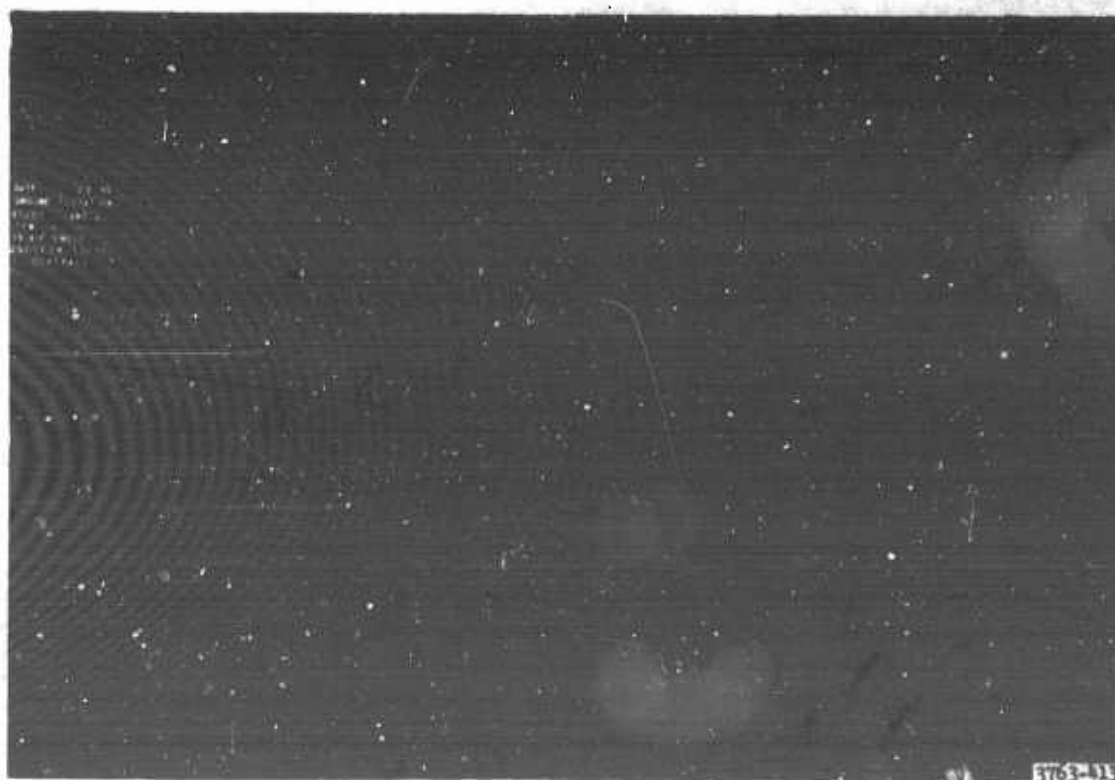


Figure 7. Lane 21, item 3, prior to traffic

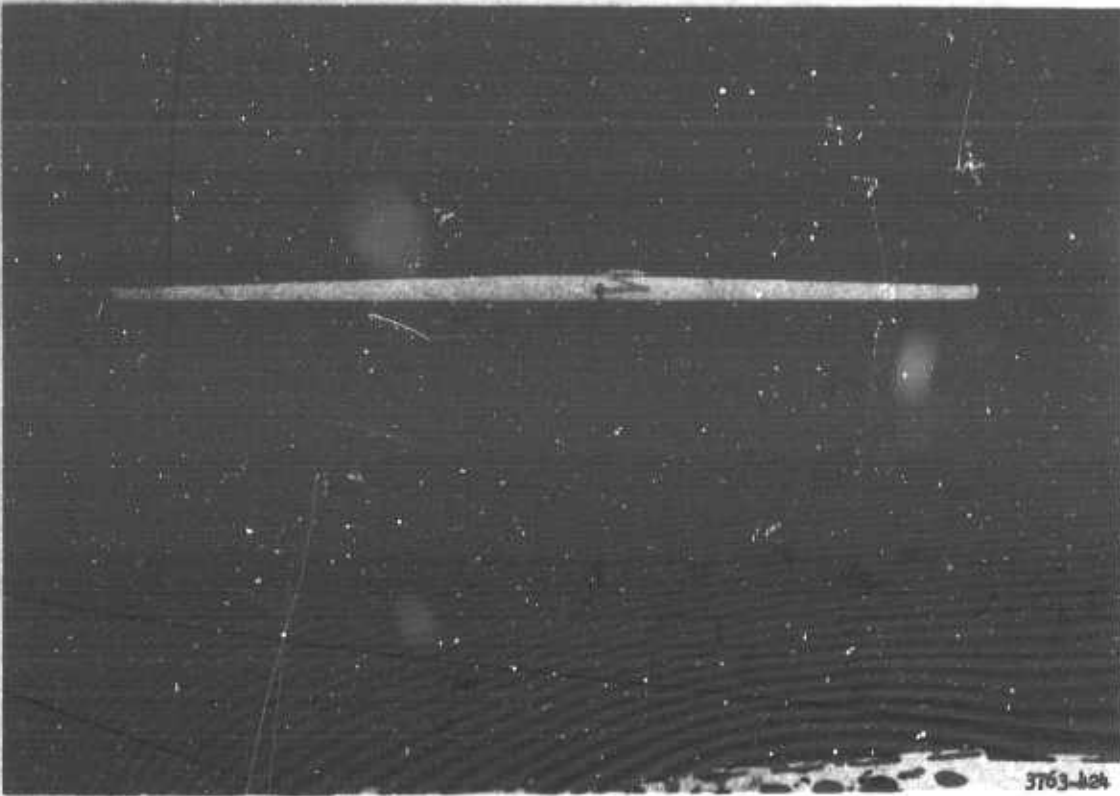


Figure 8. Lane 21, item 3. Transverse straightedge shows roughness at 300 coverages (failure)



Figure 9. Lane 22, item 1, prior to traffic

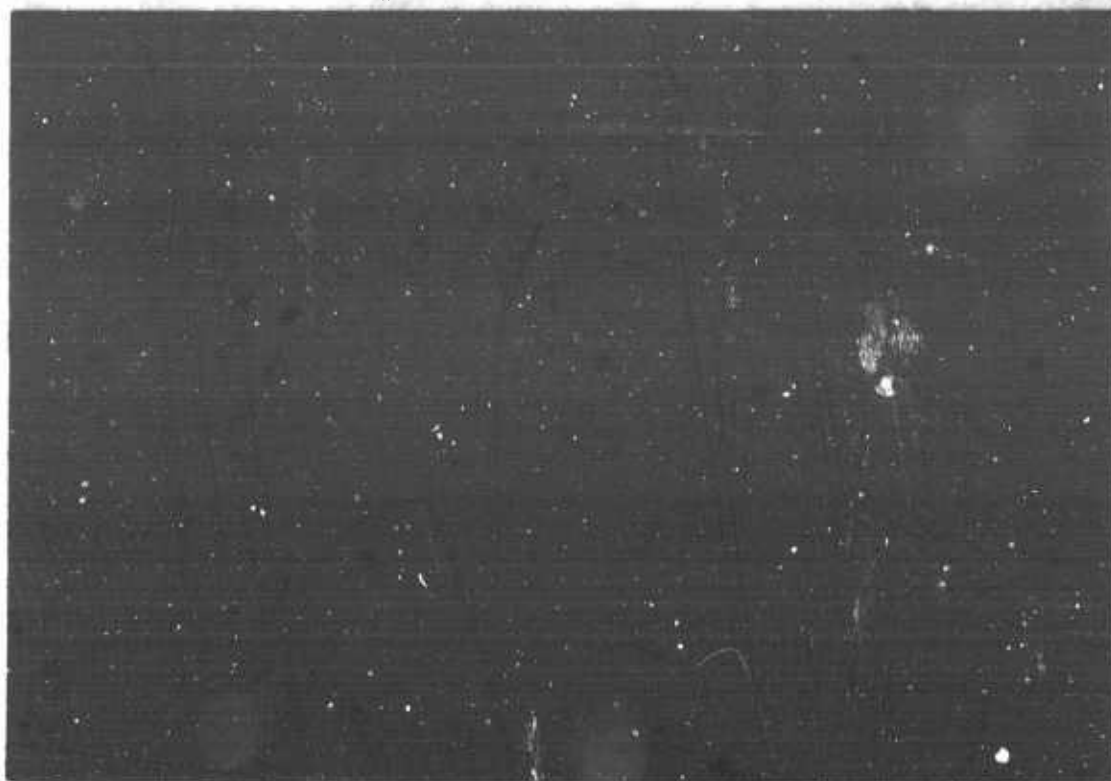


Figure 10. Lane 22, item 1. Transverse straightedge shows roughness at 400 coverages (failure)

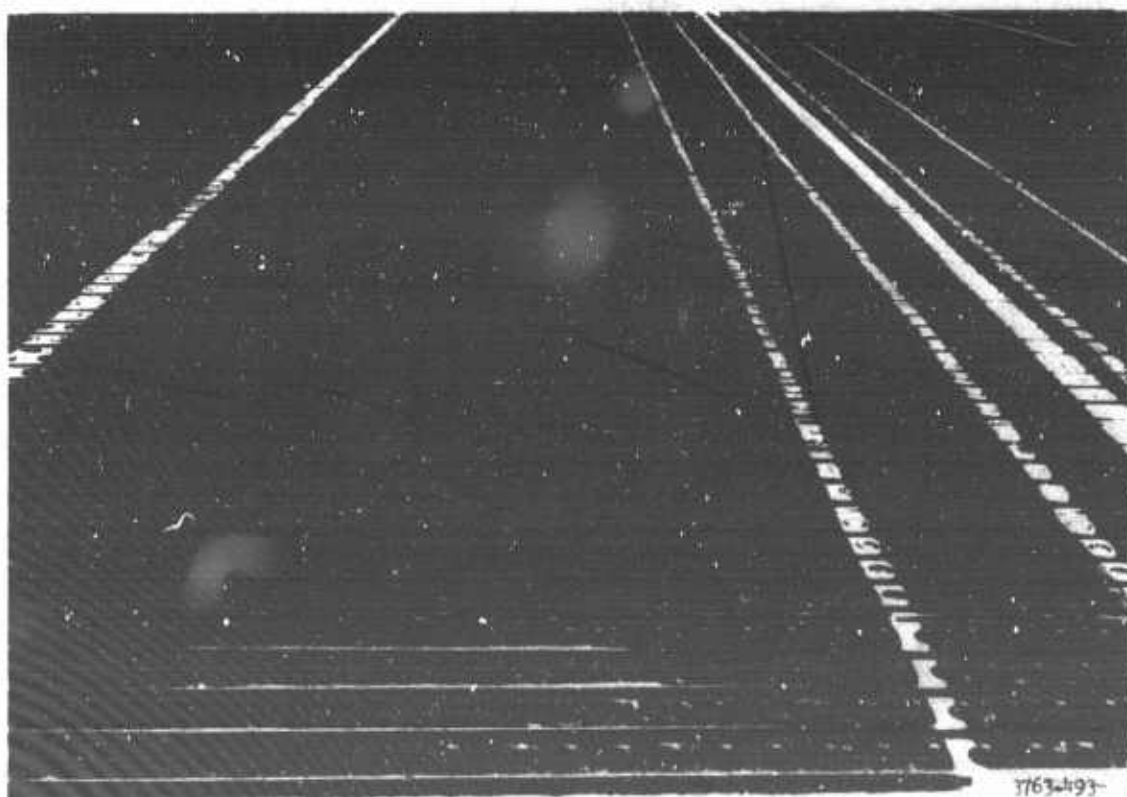


Figure 11. Lane 22, item 2, prior to traffic

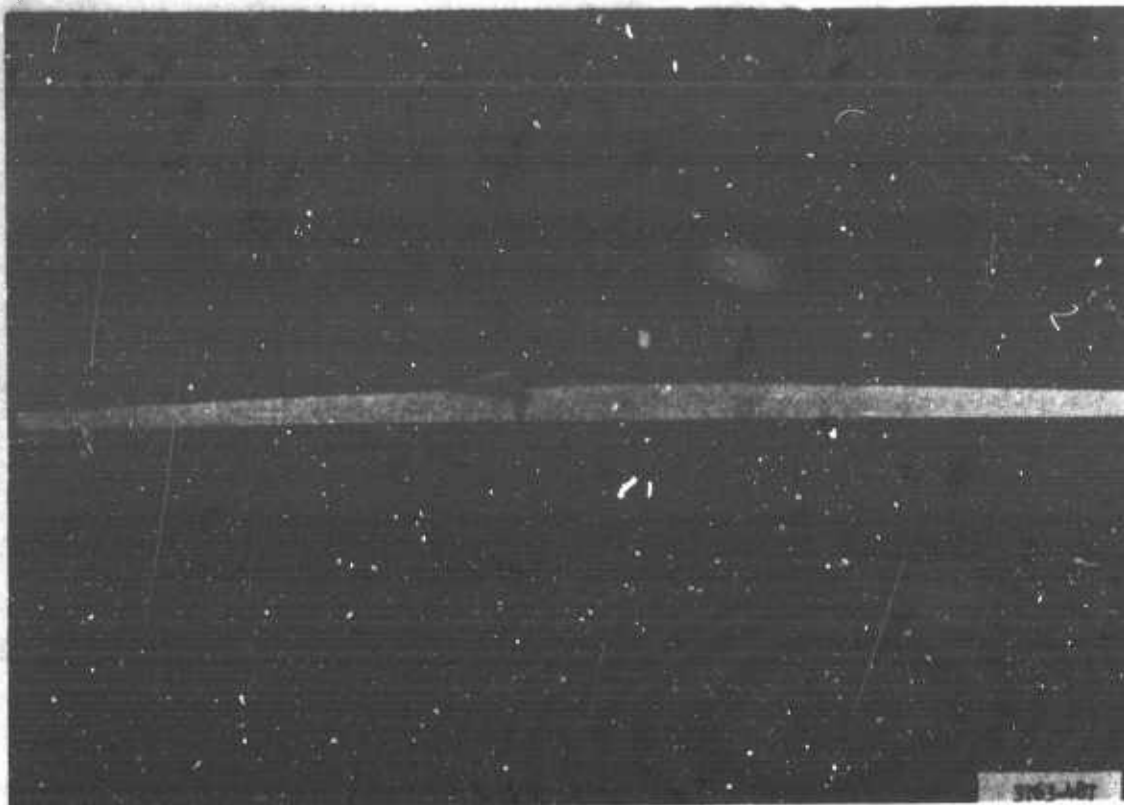


Figure 12. Lane 22, item 2. Transverse straightedge shows roughness at 100 coverages (failure)

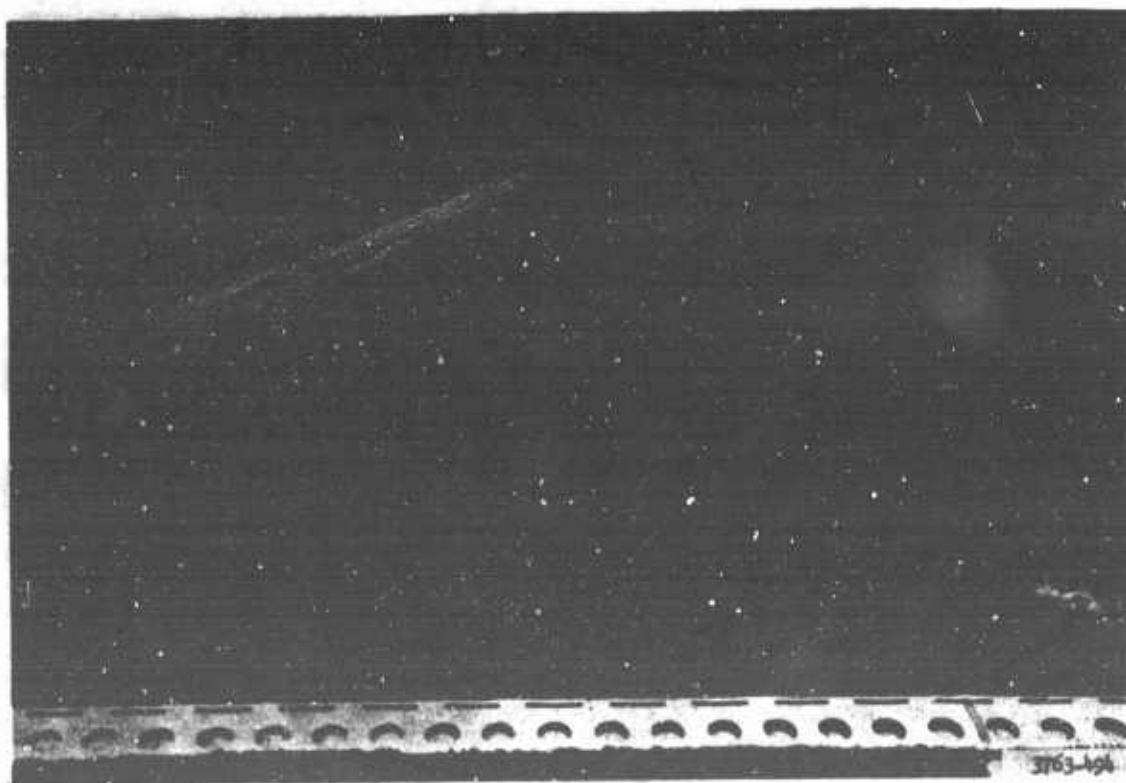


Figure 13. Lane 22, item 3, prior to traffic

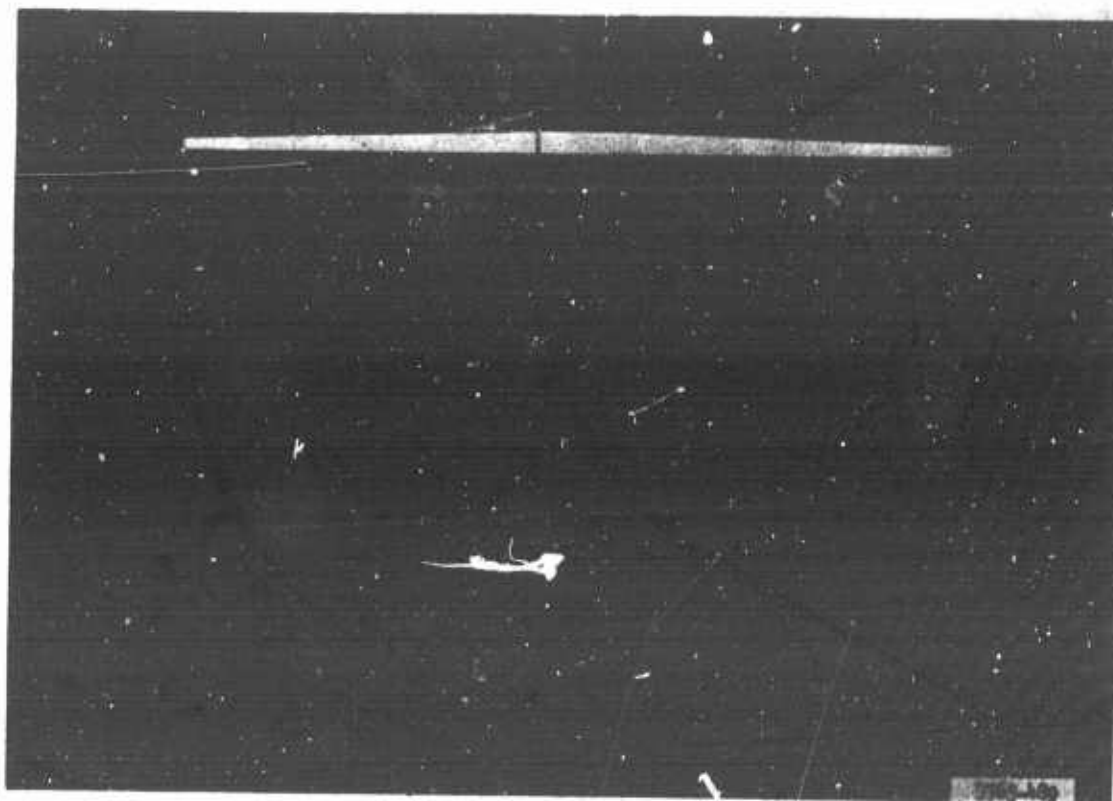


Figure 14. Lane 22, item 3. Transverse straightedge shows roughness at 100 coverages (failure)

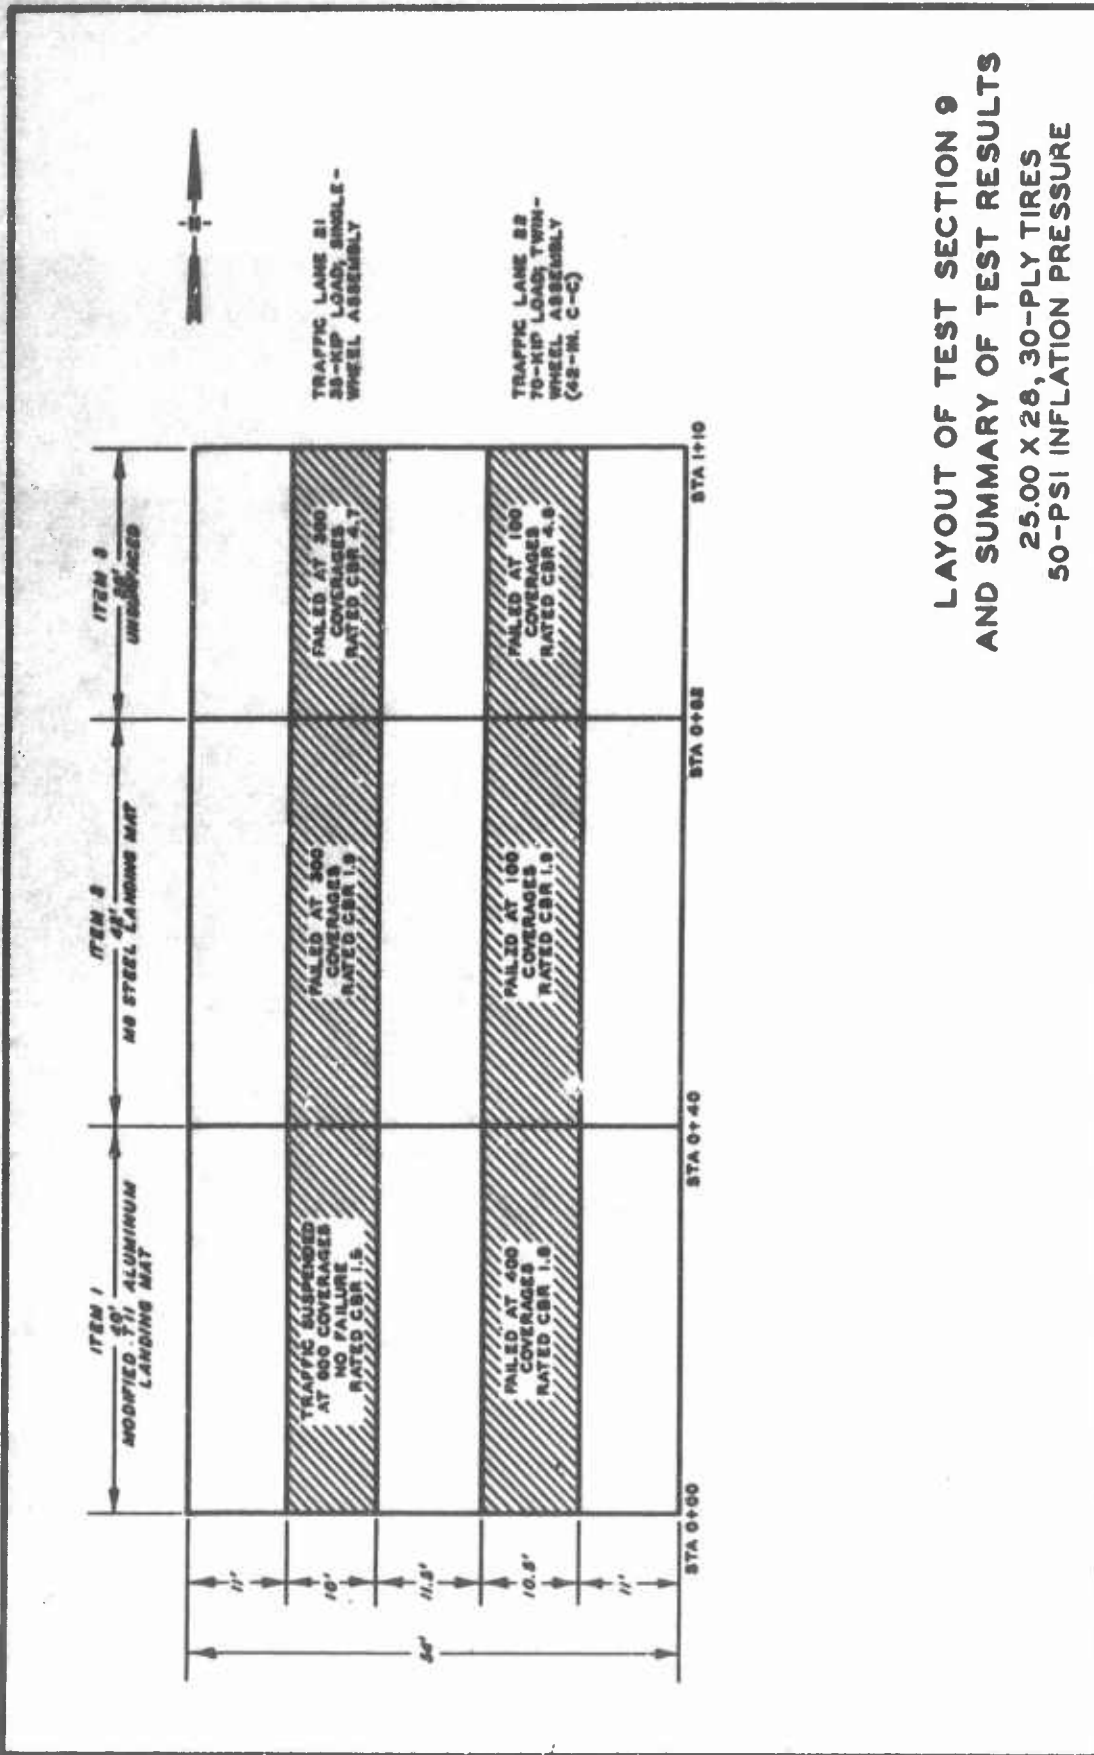
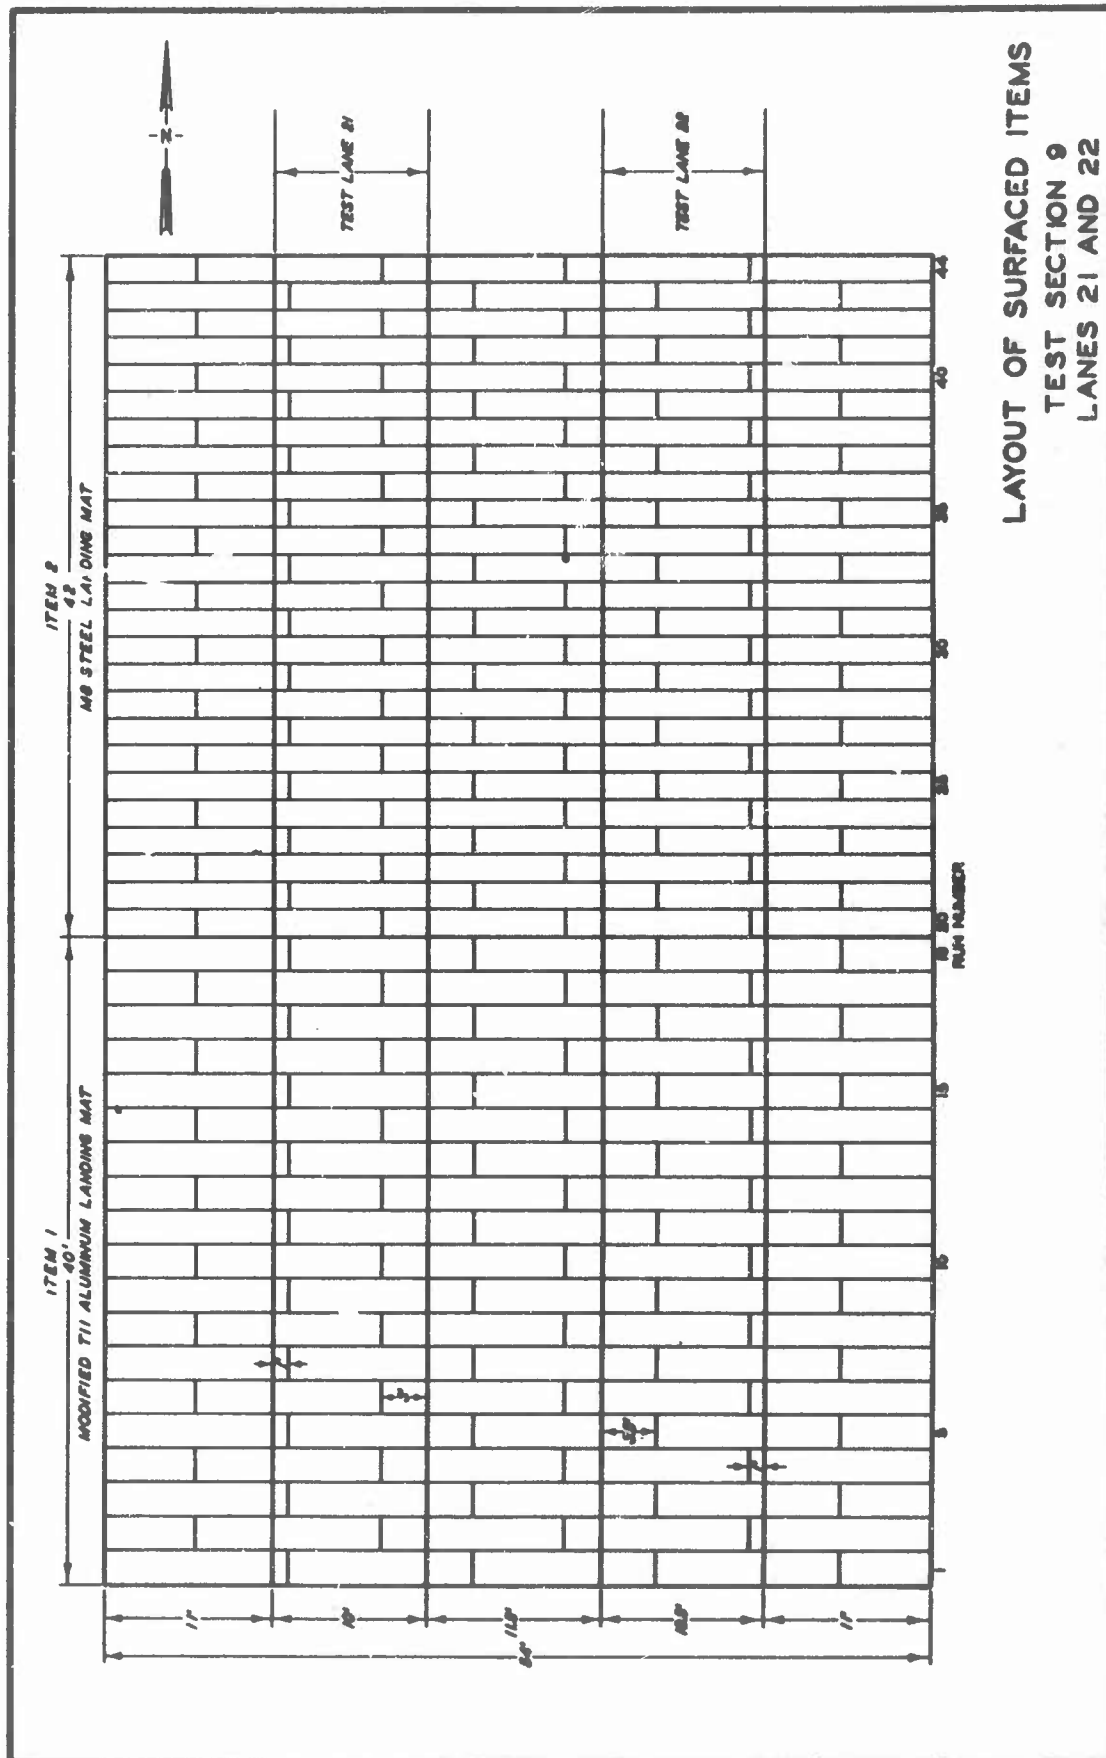


Figure 15





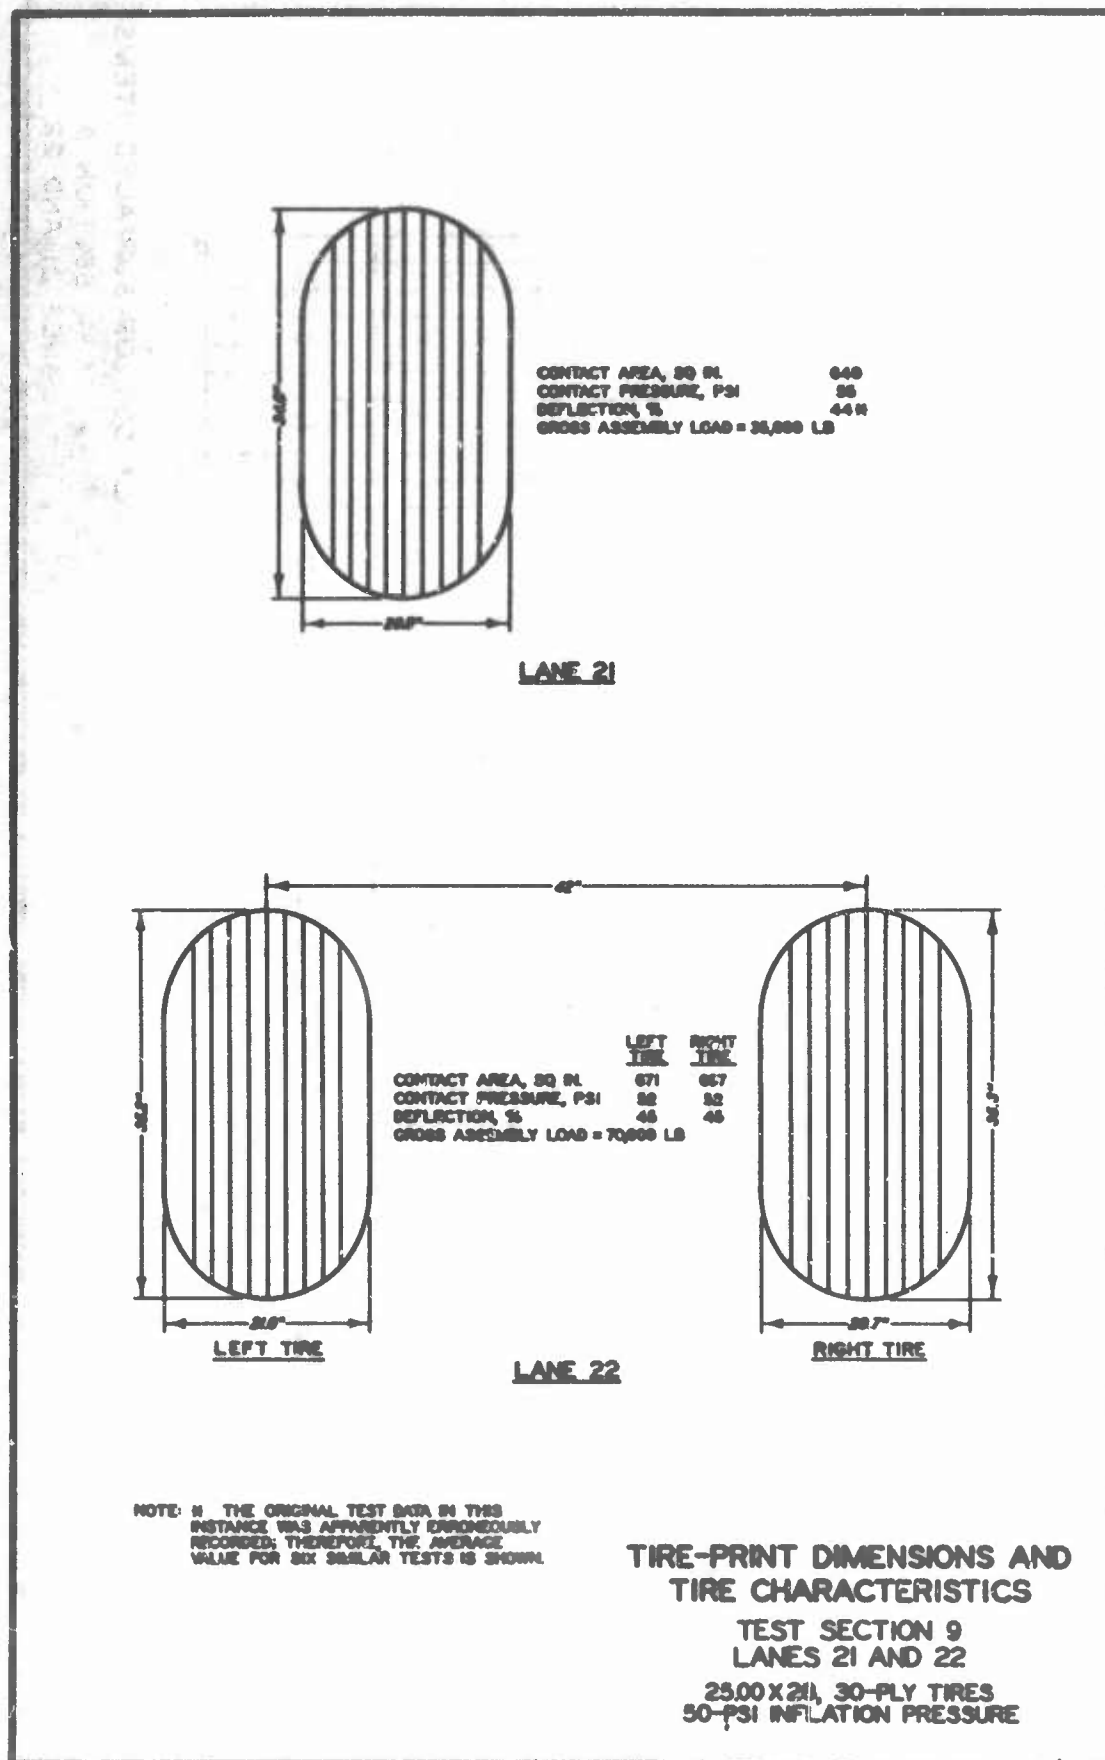


Figure 17





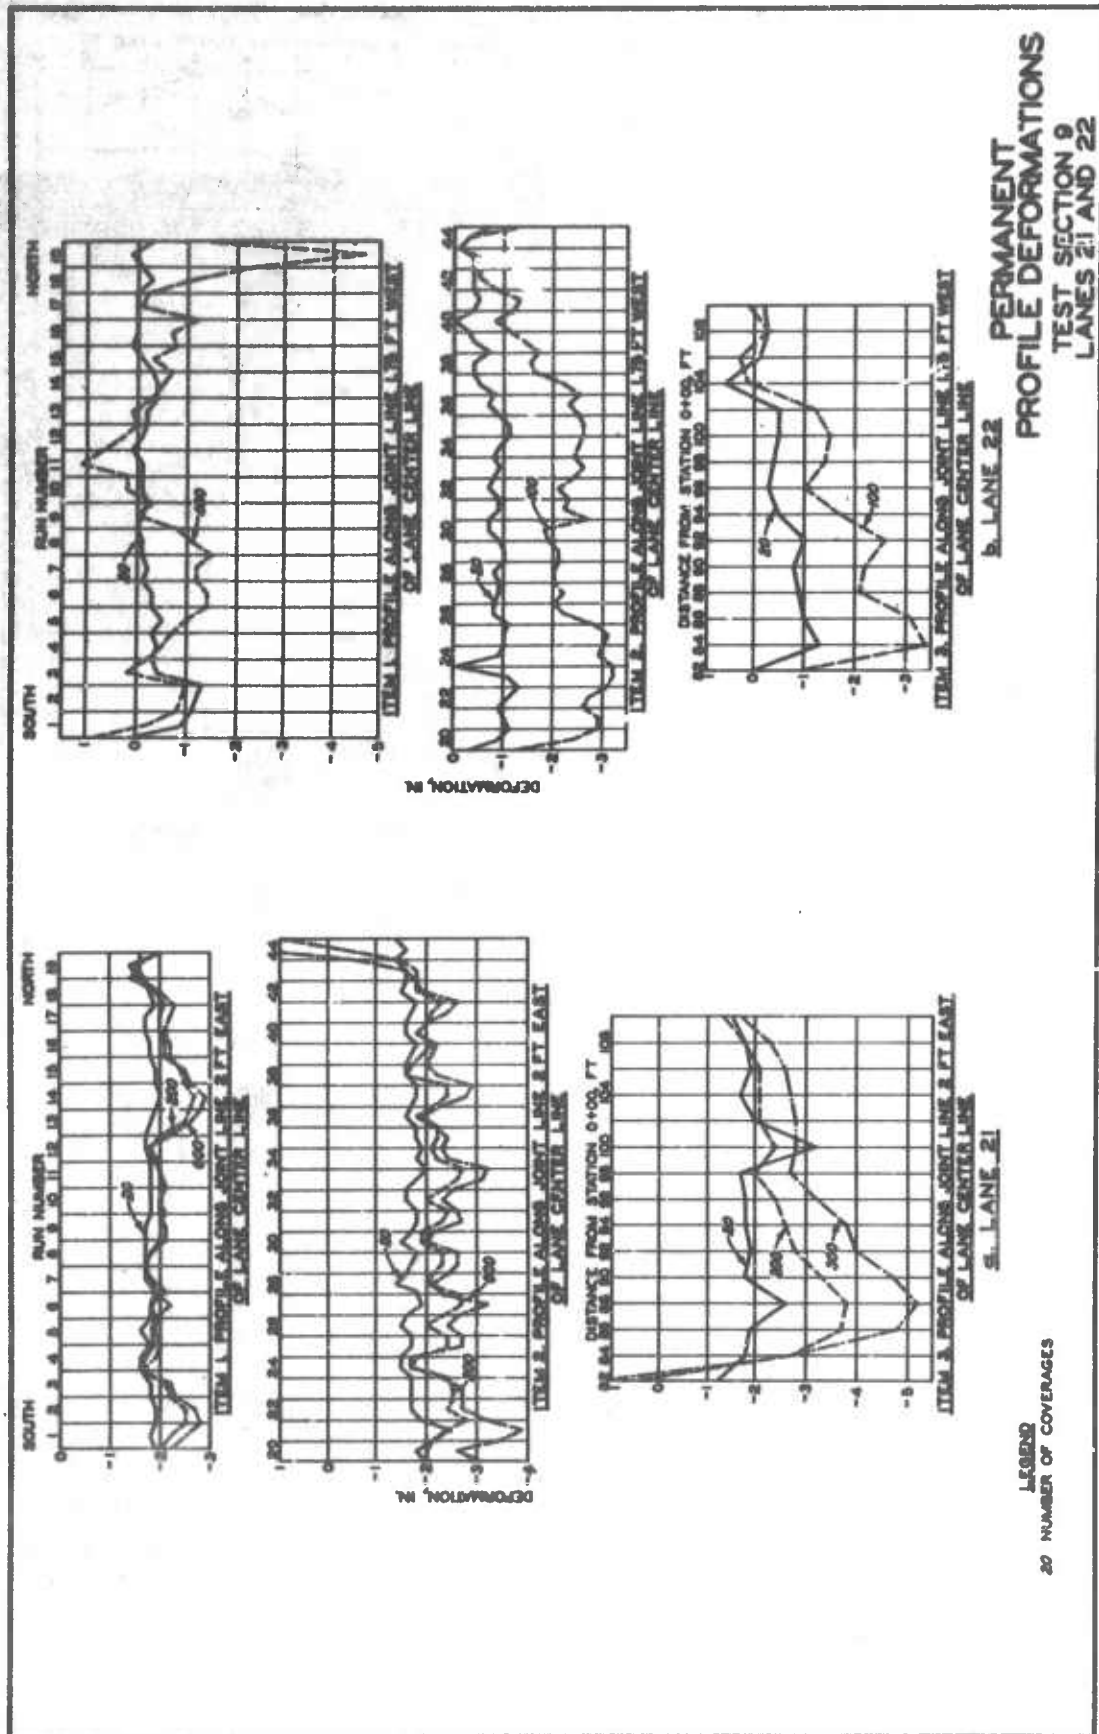


Figure 19

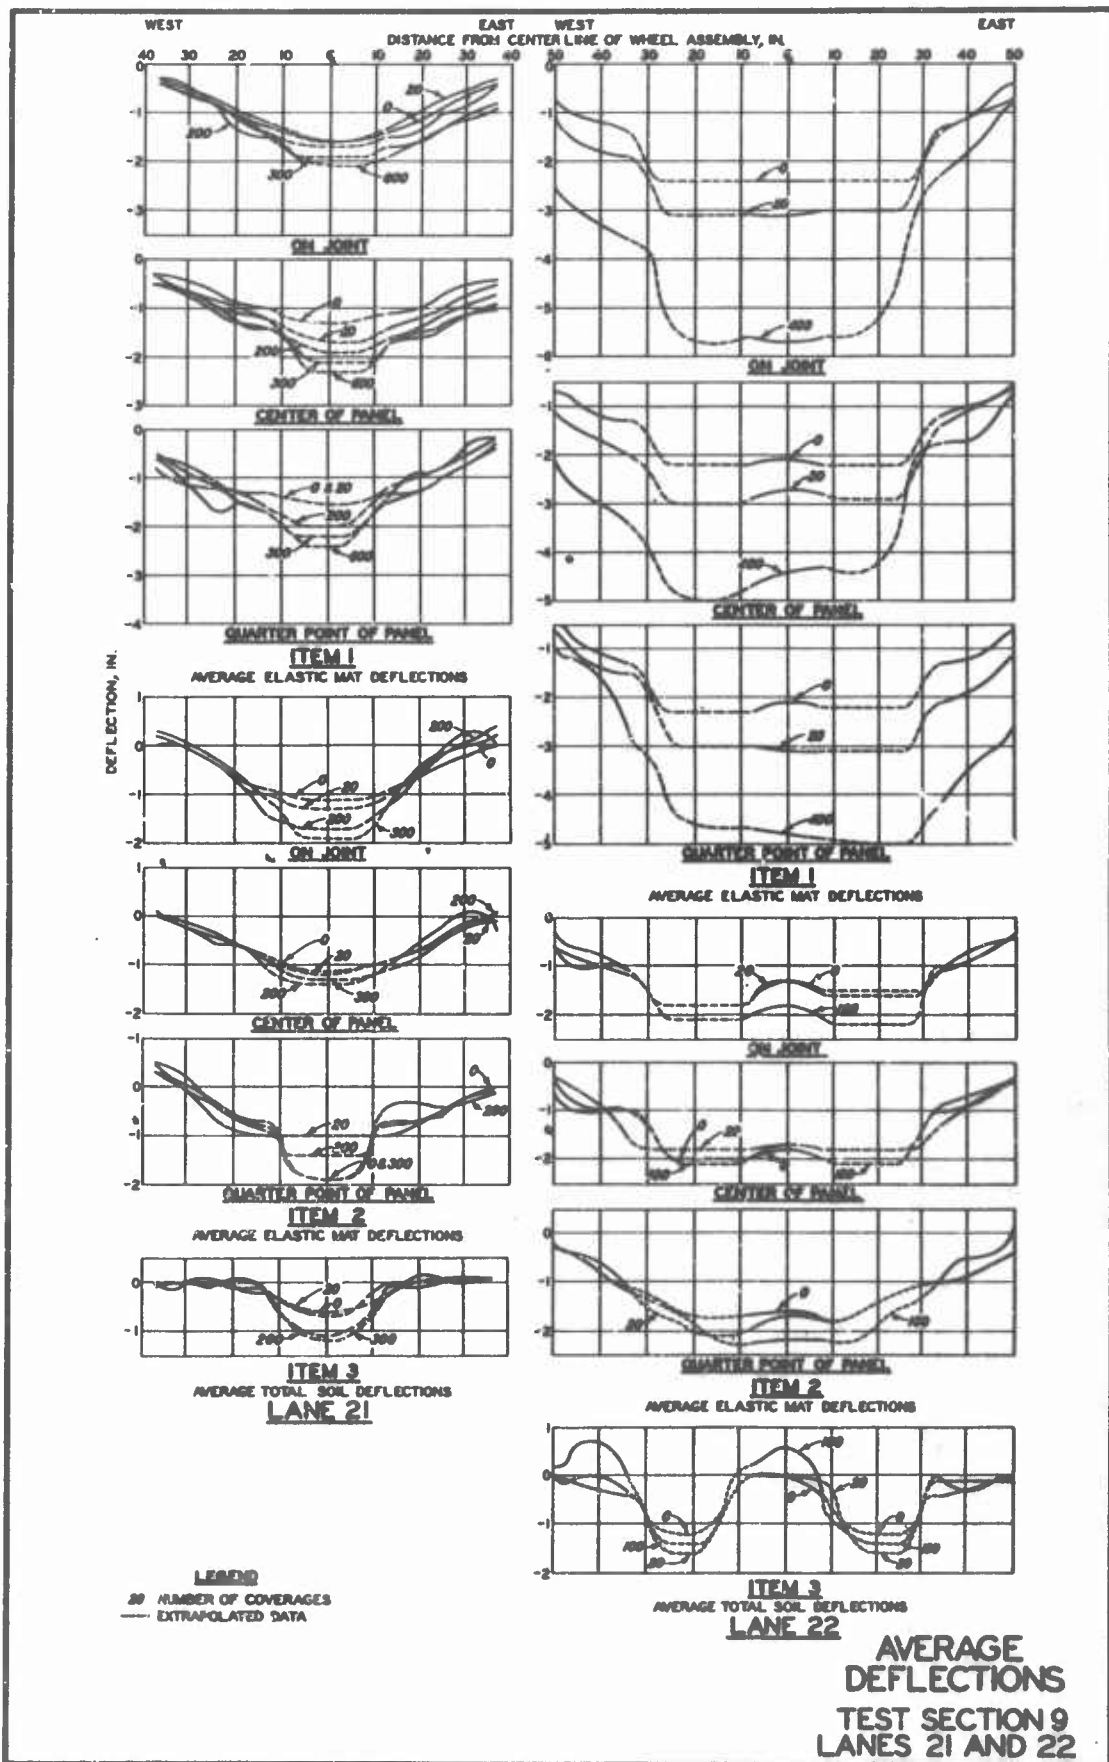


Figure 20

UNCLASSIFIED

## Security Classification

## DOCUMENT CONTROL DATA - R&amp;D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

## 1. ORIGINATING ACTIVITY (Corporate author)

U. S. Army Engineer Waterways  
Experiment Station2a. REPORT SECURITY CLASSIFICATION  
UNCLASSIFIED

## 2b. GROUP

## 3. REPORT TITLE

Aircraft Ground-Flotation Investigation  
Part X Data Report on Test Section 9

## 4. DESCRIPTIVE NOTES (Type of report and inclusive dates)

Final Technical Report

## 5. AUTHOR(S) (Last name, first name, initial)

Brabston, W. N.  
Hill, W. J., Jr.

## 6. REPORT DATE

September 1966

## 7a. TOTAL NO. OF PAGES

27

## 7b. NO. OF REFS

## 8a. CONTRACT OR GRANT NO.

MIPR AS-4-177

## A. PROJECT NO.

410A

## C.

## D.

## 9a. ORIGINATOR'S REPORT NUMBER(S)

AFFDL-TR-66-43, Part X.

9b. OTHER REPORT NO(S) (Any other numbers that may be assigned  
this report)

None

## 10. AVAILABILITY/LIMITATION NOTICES

This document is subject to special export controls and each transmittal to foreign governments or foreign nationals may be made only with prior approval of the Air Force Flight Dynamics Laboratory (EDDM), Wright-Patterson AFB, Ohio 45433.

## 11. SUPPLEMENTARY NOTES

## 12. SPONSORING MILITARY ACTIVITY

Air Force Flight Dynamics Laboratory  
Research and Technology Division  
AF Systems Command, WPAFB, Ohio

## 13. ABSTRACT

This data report describes the results of work undertaken as part of an overall program to develop ground-flotation criteria for the C-5A aircraft.

UNCLASSIFIED

Security Classification

14.

## KEY WORDS

Aircraft Ground Plotation  
Rolling Resistance  
Rear Area Airfields  
Support Area Airfields  
Forward Area Airfields  
Vehicle Mobility

## LINK A

## LINK B

## LINK C

ROLE

WT

ROLE

WT

ROLE

WT

## INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (corporate author) issuing the report.

2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parentheses immediately following the title.

4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. **REPORT DATE:** Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.

7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.

8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (either by the originator or by the sponsor), also enter this number(s).

10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those

imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through \_\_\_\_\_."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through \_\_\_\_\_."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through \_\_\_\_\_."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (paying for) the research and development. Include address.

13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.

UNCLASSIFIED

Security Classification